




NTN Bearing Driveshaft do Brasil

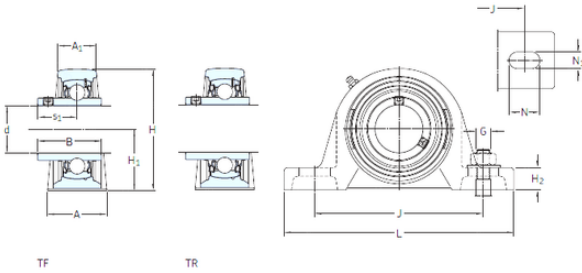

SKF SYH 1. WF bearing units

Bearing No. SYH 1. WF

| | |
|-------------------------------|-----------------------|
| Bore Diameter | 25,4 mm |
| d | 25,4 mm |
| s1 | 26,9 mm |
| A | 36 mm |
| A1 | 22 mm |
| B1 | 44,4 mm |
| H | 67 mm |
| H1 | 33,4 mm |
| H2 | 12,9 mm |
| J | 102 mm |
| L | 130 mm |
| N | 19,5 mm |
| N1 | 11,5 mm |
| Thread (G) | 10 |
| Weight | 0,79 Kg |
| Basic dynamic load rating (C) | 14 kN |
| Basic static load rating (C0) | 7,8 kN |
| Fatigue load limit (Pu) | 0,335 |
| Category | Pillow Block Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.86 |
| EAN | 7316577747990 |
| Product Group | M06110 |
| Number of Mounting Holes | 2 |

SYH 1. WF Bearing 2D drawings and 3D CAD models



NTN Bearing Driveshaft do Brasil

| | |
|----------------------------------|---|
| Mounting Method | Eccentric Collar |
| Housing Style | 2 Bolt Pillow Block |
| Rolling Element | Ball Bearing |
| Housing Material | Cast Iron |
| Expansion / Non-expansion | Non-expansion |
| Mounting Bolts | 3/8 Inch |
| Relubricatable | Yes |
| Insert Part Number | YEL 205-100-2F |
| Seals | M Seal |
| Housing Configuration | 1 Piece Solid |
| Inch - Metric | Inch |
| Other Features | Single Row Standard Duty Wide Inner Race Low Base Has Flinger |
| Long Description | 2 Bolt Pillow Block; 1" Bore; 1-5/16" Base to Center Height; Eccentric Collar Mount; Ball Bearing; 3-11/16" Minimum Bolt Spacing; 4-11/32" Bolt Spacing Maximum; Relubricatable; Cas |
| Category | Pillow Block |
| UNSPSC | 31171511 |
| Harmonized Tariff Code | 8483.20.40.40 |
| Noun | Bearing |
| Keyword String | Pillow Block |
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | SYH 1. WF |
| Weight / LBS | 1.9 |
| Bore | 1 Inch 25.4 Millimeter |
| Base to Center Height | 1.313 Inch 33.35 Millimeter |
| Nominal Bolt Center to Center | 4.1 Inch 105 Millimeter |
| | |



NTN Bearing Driveshaft do Brasil

| | |
|---------------------------------|------------------------------------|
| Length Thru Bore | 1.75 Inch 44.45 Millimeter |
| Bolt Spacing Minimum | 3.688 Inch 93.675 Millimeter |
| Bolt Spacing Maximum | 4.344 Inch 110.338 Millimeter |
| Actual Bolt Center to Center | 0 Inch 0 Millimeter |