




NTN Bearing Driveshaft do Brasil

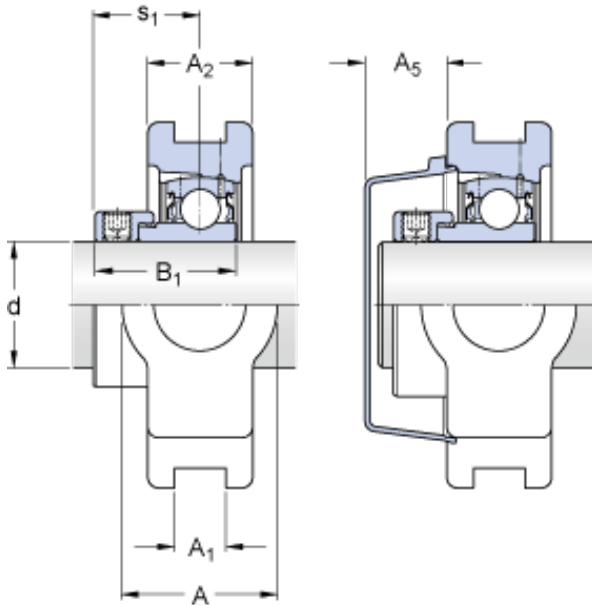

TU 20 FM Bearing 2D drawings and 3D CAD models

SKF TU 20 FM bearing units

Bearing No. TU 20 FM

Size	20x34x13.5 mm
Bore Diameter	20 mm
Outer Diameter	34 mm
Width	13,5 mm
d	20 mm
A	34 mm
A ₁	13.5 mm
A ₂	25 mm
A ₅	18.5 mm
B	21.5 mm
H	92 mm
H ₁	76 mm
H ₂	54 mm
L	97 mm
L ₁	62 mm
L ₂	10 mm
L ₃	54 mm
H	19 mm
N ₁	16 mm
N ₂	32 mm
s ₁	24 mm
D _N	6.5 mm
SW _N	7 mm
G _N - 1/4-28 SAE-LT	1/428 SAELT



NTN Bearing Driveshaft do Brasil

R _G - 1/4-28 UNF	1/428 UNF
R ₁	2.5 mm
R	30 °
Basic dynamic load rating - C	12.7 kN
Basic static load rating - C ₀	6.6 kN
Fatigue load limit - P _u	0.28 kN
Limiting speed with shaft tolerance h6	8500 r/min
Mass bearing unit	0.92 kg
Grub (set) screw - G ₂	M6x0.75
Hexagonal key size for grub screw - H	3 mm
Recommended tightening torque for grub screw	4 N · m
Category	Take Up Unit Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.93
EAN	7316577300027
Product Group	M06110
Component Description	Take Up Bearing Only
Rolling Element	Ball Bearing
Housing Style	Unit Only
Mounting Method	Eccentric Collar
Compatible Take Up Frame	Not Specified
Adjustment Travel Length	0
Insert Part Number	YET 204
Housing Material	Cast Iron
Other Features	Single Row Spherical Standard Duty Narrow Inner Race Y Bearing M Seal



NTN Bearing Driveshaft do Brasil

Inch - Metric	Metric
Long Description	Take Up Bearing Only; 20MM Bore; 13.5MM Slot Width; 76MM Slot to Slot Distance; Ball Bearing; Unit Only; Eccentric Collar Mount; YET 204 Insert Part; Cast Iron Housing Material
Category	Take Up Units
UNSPSC	31171533
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Take Up
Manufacturer URL	http://www.skf.com
Weight / LBS	1.609
Slot to Slot Distance	2.992 Inch 76 Millimeter
Bore	0.787 Inch 20 Millimeter
Slot Width	0.531 Inch 13.5 Millimeter
Housing material	Cast iron
A ₁	13.5 mm
A ₂	25 mm
A ₅	18.5 mm
H ₁	76 mm
H ₂	54 mm
L ₁	62 mm
L ₂	10 mm
L ₃	54 mm
N	19 mm
N ₁	16 mm
N ₂	32 mm
s ₁	24 mm
R _G	1/4-28 UNF
R ₁	2.5 mm
R	30 °



NTN Bearing Driveshaft do Brasil

D_N	6.5 mm
SW_N	7 mm
G_N	1/4-28 SAE-LT
Basic dynamic load rating C	12.7 kN
Basic static load rating C_0	6.55 kN
Fatigue load limit P_u	0.28 kN
Grub (set) screw G_2	M6x0.75
Hexagonal key size for grub screw N	3 mm