




NTN Bearing Driveshaft do Brasil

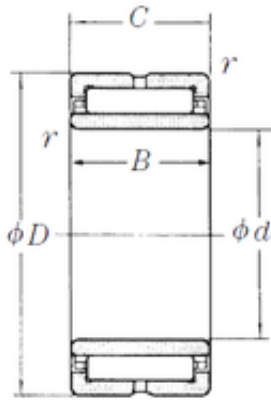

95 mm x 130 mm x 35 mm 95 mm x 130 mm x 35 mm NSK NA4919 needle roller bearings

Bearing No. NA4919

NA4919 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 95x130x35 mm |
| Bore Diameter | 95 mm |
| Outer Diameter | 130 mm |
| Width | 35 mm |
| d | 95 mm |
| Fw | 110 mm |
| D | 130 mm |
| B | 35 mm |
| C | 35 mm |
| r min. | 1,1 mm |
| da min. | 101,5 mm |
| Da max. | 123,5 mm |
| ra max. | 1 mm |
| Weight | 1,4 Kg |
| Basic dynamic load rating (C) | 111 kN |
| Basic static load rating (C0) | 242 kN |
| (Grease) Lubrication Speed | 2200 r/min |
| hidYobi | NA4919 |
| LangID | 1 |
| D_ | 130 |
| B_ | 35 |
| hidTable | ecat_NSMRNR |
| GRS rpm | 2200 |
| ra | 1 |
| da_min | 101.5 |



NTN Bearing Driveshaft do Brasil

| | |
|------------|----------|
| d2 | 95 |
| C0 | 242 |
| C1_ | 35 |
| DE_ | 123 |
| SLR | 26.5 |
| Prod_Type3 | NRB_S_NA |
| DA_ | 6.5 |
| Z_ | 36 |
| SI | 110 |
| yobi | NA4919 |
| da_max | 123 |
| OIL rpm | 3800 |
| SDM_ | 116.5 |
| r | 1.1 |
| KBRG | 8353 |
| mass2 | 1.4 |
| B1 | 35 |