




## NTN Bearing Driveshaft do Brasil

### Japan NTN Rodamiento 6205LLU Deep Groove Ball Bearing

Bearing No. 6205LLU

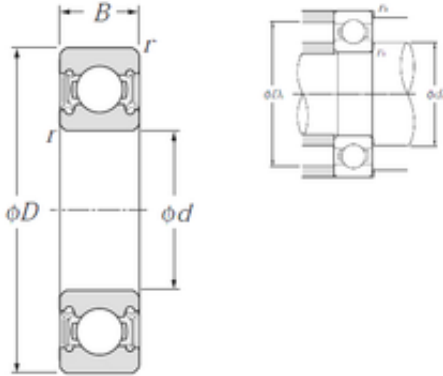

6205LLU Bearing 2D drawings and 3D CAD models

Size	25x52x15 mm
Bore Diameter	25 mm
Outer Diameter	52 mm
Width	15 mm
d	25 mm
D	52 mm
B	15 mm
C	15 mm
r min.	1 mm
da min.	30 mm
da max	32 mm
Da max.	47 mm
ra max.	1 mm
Weight	0,128 Kg
Basic dynamic load rating (C)	14 kN
Basic static load rating (C0)	7,85 kN
Reference speed	8 900 r/min
Category	Single Row Ball Bearings
Inventory	1.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.127
EAN	4547359004588
Product Group	B00308
Enclosure	2 Seals



## NTN Bearing Driveshaft do Brasil

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	25MM Bore; 52MM Outside Diameter; 15MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6205LLU
Weight / LBS	0.28
Inner Race Width	0 Inch   0 Millimeter
Bore	0.984 Inch   25 Millimeter
Outer Race Width	0.591 Inch   15 Millimeter
Outside Diameter	2.047 Inch   52 Millimeter
bore diameter:	25 mm



## NTN Bearing Driveshaft do Brasil

precision rating:	ISO Class 0
outside diameter:	52 mm
finish/coating:	Uncoated
overall width:	15 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	15 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	15 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	8900 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	15000 RPM
dynamic load capacity:	14000 N
series:	62
static load capacity:	7850 N
manufacturer product page:	<a href="#">Click here</a>