




NTN Bearing Driveshaft do Brasil

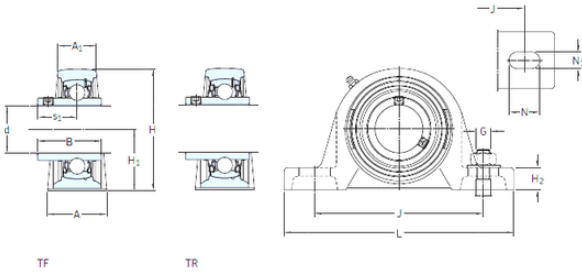

SKF SYH 2.3/16 WF bearing units

Bearing No. SYH 2.3/16 WF

SYH 2.3/16 WF Bearing 2D drawings and 3D CAD models

Bore Diameter	55,563 mm
d	55,563 mm
s1	43,6 mm
A	60,4 mm
A1	40 mm
B1	71,4 mm
H	126,5 mm
H1	61,9 mm
H2	23,3 mm
J	171,5 mm
L	219 mm
N	27,5 mm
N1	18 mm
Thread (G)	16
Weight	3,95 Kg
Basic dynamic load rating (C)	43,6 kN
Basic static load rating (C0)	29 kN
Fatigue load limit (Pu)	1,25
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	3.95
EAN	7316577755841
Product Group	M06110
Number of Mounting Holes	2



NTN Bearing Driveshaft do Brasil

Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Mounting Bolts	5/8 Inch
Relubricatable	Yes
Insert Part Number	YEL 211-203-2F
Seals	M Seal
Housing Configuration	1 Piece Solid
Inch - Metric	Inch
Other Features	Single Row Standard Duty Wide Inner Race Low Base Has Flinger
Long Description	2 Bolt Pillow Block; 2-3/16" Bore; 2-7/16" Base to Center Height; Eccentric Collar Mount; Ball Bearing; 6-3/8" Minimum Bolt Spacing; 7-1/8" Bolt Spacing Maximum; Relubricatable; Ca
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	SYH 2.3/16 WF
Weight / LBS	8.7
Bolt Spacing Minimum	6.375 Inch 161.925Millimeter
Bore	2.188 Inch 55.575 Millimeter
Nominal Bolt Center to Center	6.8 Inch 171.5 Millimeter



NTN Bearing Driveshaft do Brasil

Length Thru Bore	2.813 Inch 71.45 Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Base to Center Height	2.438 Inch 61.925 Millimeter
Bolt Spacing Maximum	7.125 Inch 180.975Millimeter