




NTN Bearing Driveshaft do Brasil

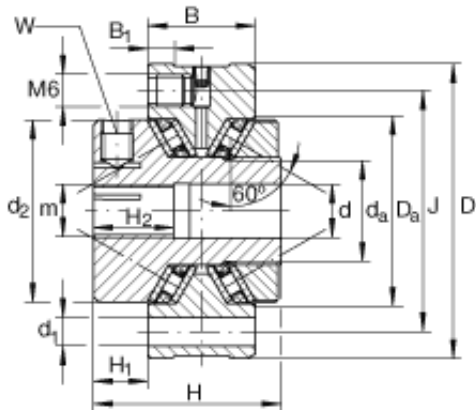

20 mm x 75 mm / The bearing outer ring is blue anodised x 25 mm 20 mm x 75 mm / The bearing outer ring is blue anodised x 25 mm INA ZAXFM2075 complex bearings

Bearing No. ZAXFM2075

ZAXFM2075 Bearing 2D drawings and 3D CAD models

Size	20x75x25 mm
Bore Diameter	20 mm
Outer Diameter	75 mm
Width	25 mm
d	20 mm
D	75 mm / The bearing outer ring is blue anodised
B	25 mm
1)	/ Lubricant feed
B ₁	5 mm
D _{a min}	50 mm
d ₁	6,5 mm
d ₂	49 mm
d ₃	5,3 mm
d _{a max}	33 mm
H	42 mm
H ₁	10 mm
H ₂	15 mm
J	63 mm
m	M20X1
t	36 mm
W	3 mm / Grub screw to DIN 913



NTN Bearing Driveshaft do Brasil

m	350 g / Weight
	M6 / Fixing screws to DIN 912
C_a	18200 N / Dynamic load rating (axial)
C_{0a}	52000 N / Static load rating (axial) $P_{0zul} = 0,5 \times C_{0a}$
n_{GFett}	800 1/min / Limiting speed
M_{RL}	10 Ncm / Frictional moment
	0,05 mm / Axial runout accuracy
C_{aL}	1050 N/ μ m / Axial rigidity
M_m	0,4571 kg x cm ² / Mass moment of inertia for rotating inner ring and integral setting nut
M_m	5 Nm / Grub screw to DIN 913